

NYRIM AN Series

DIN 15234 'Nyrim' Super Tough Industrial Duty Elevator Bucket High capacity.


Solid construction: manufactured from 'Nyrim', a high-grade nylon/rubber reaction moulding. Maximum impact, corrosion and abrasion resistant

Long bucket life

Suitable for use with elevator belting and chain: The reduced weight of the bucket enables extended chain life.

Ideal for industrial applications, such as aggregates, cement, gypsum, coal, sand, etc

1. 实心结构：使用 ‘Nyrim’ 制造，这是一种高等级的尼龙/橡胶反应模塑工艺。
2. 最强的抗冲击性、耐腐蚀性和耐磨性
3. 料斗使用寿命长
4. 适合与提升机输送带和链条配套使用：畚斗重量减少可以延长链条的使用寿命。
5. 适合工业应用环境，例如 集料、水泥、石膏、煤炭、砂等

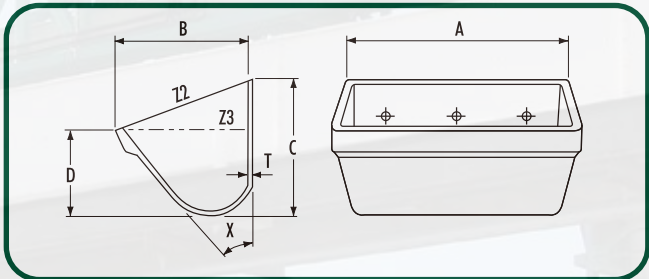

									Capacity (Litres) 容量 (升)	
No.	Nominal Size 标称尺寸	A	B	C	D	T			Z2 (total)	Z3 (water)
编号	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	X°	kg	(总计)	(水)
AN300	300 x 200	361	202	215	111	14	43	2.5	6.75	4.135
AN400	400 x 224	424	247	286	156	11	39	4	14.33	9
AN500	500 x 250	524	274	321	174	12	39	5.5	23.2	15
AN630	630 x 280	654	306	363	196	12	39	10	36	23.4

- FOR CONVEYING OFall kinds of bulk material
- FOR USE ATSilos, mills, feed mills, malt- sugar- and foods industry, chemical industry
- MATERIALNYRIM
work temperature: -60 ° C up to + 140 ° C
- FEATUREHigh impact resistance and wear resistance